


# B11

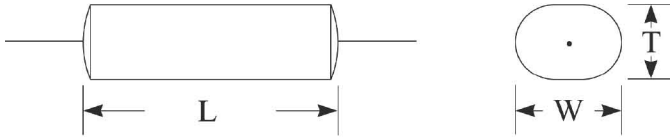

LEAD LENGTH = 1.5" MIN.

# POLYESTER & FOIL

Axial Lead      OVAL      Wrap & Fill

Lead Gauge	200VDC	400VDC	600VDC
24AWG	.001 - .10	.001 - .033	.001 - .015
22AWG	.12 - .22	.039 - .10	.018 - .047
20AWG	.27 - 2.0	.12 - 1.0	.056 - .47

## 200 VDC

## 400 VDC

## 600 VDC

MFD	T +.05	W +.05	L +.05	PART NO.	T +.05	W +.05	L +.05	PART NO.	T +.05	W +.05	L +.05	PART NO.
.0010	.11	.20	.53	B11C102	.11	.20	.53	B11E102	.11	.20	.53	B11F102
.0012	.11	.20	.53	B11C122	.11	.20	.53	B11E122	.11	.20	.53	B11F122
.0015	.11	.20	.53	B11C152	.11	.20	.53	B11E152	.11	.20	.53	B11F152
.0018	.11	.20	.53	B11C182	.11	.20	.53	B11E182	.11	.20	.68	B11F182
.0022	.11	.20	.53	B11C222	.11	.20	.53	B11E222	.11	.20	.68	B11F222
.0027	.11	.20	.53	B11C272	.11	.20	.53	B11E272	.11	.20	.68	B11F272
.0033	.11	.20	.53	B11C332	.11	.20	.53	B11E332	.11	.20	.68	B11F332
.0039	.11	.20	.53	B11C392	.11	.20	.68	B11E392	.13	.22	.68	B11F392
.0047	.11	.20	.53	B11C472	.11	.20	.68	B11E472	.14	.23	.68	B11F472
.0056	.11	.20	.53	B11C562	.11	.20	.68	B11E562	.13	.22	.81	B11F562
.0068	.11	.20	.53	B11C682	.11	.20	.68	B11E682	.14	.23	.81	B11F682
.0082	.11	.20	.53	B11C822	.13	.22	.68	B11E822	.17	.26	.81	B11F822
.010	.11	.20	.53	B11C103	.14	.23	.68	B11E103	.19	.28	.81	B11F103
.012	.11	.20	.68	B11C123	.13	.22	.81	B11E123	.20	.29	.81	B11F123
.015	.11	.20	.68	B11C153	.14	.23	.81	B11E153	.20	.29	.81	B11F153
.018	.13	.22	.68	B11C183	.17	.27	.81	B11E183	.24	.33	.95	B11F183
.022	.14	.23	.68	B11C223	.18	.28	.81	B11E223	.25	.34	.95	B11F223
.027	.15	.25	.68	B11C273	.19	.29	.81	B11E273	.26	.35	.95	B11F273
.033	.16	.26	.68	B11C333	.20	.29	.81	B11E333	.26	.35	.95	B11F333
.039	.17	.27	.81	B11C393	.25	.34	.95	B11E393	.30	.39	.95	B11F393
.047	.17	.27	.81	B11C473	.26	.35	.95	B11E473	.33	.42	.95	B11F473
.056	.18	.28	.81	B11C563	.29	.38	.95	B11E563	.38	.47	1.17	B11F563
.068	.18	.28	.81	B11C683	.31	.40	.95	B11E683	.39	.48	1.17	B11F683
.082	.20	.30	.81	B11C823	.32	.41	.95	B11E823	.40	.56	1.17	B11F823
.10	.21	.31	.81	B11C104	.33	.42	.95	B11E104	.41	.57	1.17	B11F104
.12	.25	.34	.95	B11C124	.38	.47	1.17	B11E124	.44	.61	1.45	B11F124
.15	.26	.35	.95	B11C154	.39	.48	1.17	B11E154	.45	.62	1.45	B11F154
.18	.28	.37	.95	B11C184	.40	.56	1.17	B11E184	.46	.63	1.45	B11F184
.22	.29	.38	.95	B11C224	.41	.57	1.17	B11E224	.47	.63	1.45	B11F224
.27	.27	.44	1.17	B11C274	.40	.56	1.45	B11E274	.57	.73	1.68	B11F274
.33	.28	.45	1.17	B11C334	.41	.57	1.45	B11E334	.59	.75	1.68	B11F334
.39	.32	.49	1.17	B11C394	.46	.62	1.68	B11E394	.64	.80	1.95	B11F394
.47	.35	.52	1.17	B11C474	.47	.63	1.68	B11E474	.66	.82	1.95	B11F474
.56	.38	.55	1.17	B11C564	.53	.69	1.95	B11E564				
.68	.41	.57	1.17	B11C684	.54	.70	1.95	B11E684				
.82	.40	.56	1.45	B11C824	.60	.76	1.95	B11E824				
1.0	.41	.57	1.45	B11C105	.66	.82	1.95	B11E105				
1.2	.48	.64	1.45	B11C125								
1.5	.54	.70	1.45	B11C155								
1.8	.57	.73	1.68	B11C185								
2.0	.59	.75	1.68	B11C205								



## Bishop Electronics Corporation

3729 San Gabriel River Parkway • Pico Rivera CA 90660  
 (562) 695-0446 (562) 692-9391 FAX : (562) 692-4008  
 email: Sales@bishopelectronics.com